

Product Description

LF-AAD008-0700-12 is an 8W constant current DALI or PUSH dimmable LED driver. Its input voltage ranges from 198 to 264Vac and output current can be adjusted via DIP switch from 350mA to 700mA, in steps of 50mA.

Features

- IP20
- Suitable for Class II light fixtures
- Constant current output and output current adjustable via DIP switch
- DALI or PUSH dimmable; logarithmic or linear dimming curve selectable on DALI interface
- Built-in active PFC function
- Standby power consumption <0.5W
- 0.1% dimming depth
- 5-year warranty (please refer to the warranty condition)




Applications

- Horticultural lighting
- Indoor office lighting
- Decorative lighting
- Commercial lighting
- Residential lighting

Product Naming

LF- AAD008- 0700- 12

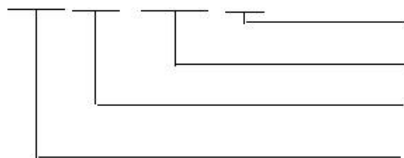

42: maximum output voltage: 42V

0700: maximum output current: 700mA

008: rated power: 8W

AAD: DALI LED driver


Electrical Characteristics

Model		LF-AAD008-0700-12							
Output	Output Voltage (DC)	2-12V							
	Output Current	Adjustable via DIP switch; please refer to the DIP Switch Table							
		350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA
	Flicker Index	IEC-Pst ≤ 1 , CIE SVM ≤ 0.9 , modulation depth $\leq 1\%$ Complies with the flicker-free standard (IEEE Std 1789-2015)							
	Ripple Current	$< 10\%$ (rated current)				$< 5\%$ (rated current)			
	Current Tolerance	$\pm 5\%$							
	Temperature Drift	$\pm 5\%$							
	Start-up Time	$< 1.5S@230Vac$							
Input	Input Voltage	220-240Vac (voltage limit: 198-264Vac)							
	DC Input Voltage	180-280Vdc							
	Input Frequency	47Hz-63Hz							
	Input Current	0.1A Max							
	Power Factor	≥ 0.85		≥ 0.90		≥ 0.91		≥ 0.92	
		THD $\leq 15\%@230Vac$ (narrowband; full load)							
	Efficiency	$\geq 65\%$		$\geq 73\%$		$\geq 75\%$		$\geq 77\%$	
		Inrush Current $\leq 19A \& 1.5uS@230Vac$ (Max)							
	Load Quantity Carried by the Circuit Breaker	Circuit Breaker Model		B10	C10	B16	C16		
		Quantity (pcs)		66	66	106	106		
	Surge Protection	L-N: 1kV; PUSH: 600V							
	Leakage Current	$\leq 0.7mA$							
	Standby Power Consumption	$\leq 0.5W$ (when DALI OFF signal is effective)							
Protections	Open Circuit	$< 35V$							
	Short Circuit	Hiccup mode (auto-recovery)							
Environment Descriptions	Working Temperature	$-20^{\circ}C - +45^{\circ}C$							
	Working Humidity	20-90%RH (no condensation)							
	Storage Temperature/Humidity	$-30^{\circ}C - 80^{\circ}C$ (six months under class I environment);							
		10-90%RH (no condensation)							
Atmospheric Pressure	86kPa~106kPa								


Safety & Electromagnetic Compatibility	Certifications	TUV-ENEC, CE, CB, RCM, CCC
	Withstanding Voltage	I/P-O/P: 3.75kV 5mA 60S
	Insulation Resistance	I/P-O/P: >100MΩ@500Vdc
	Safety Standards	ENEC: EN61347-1: 2015, EN 61347-2-13: 2014/A1: 2017, EN 62384: 2016/A1: 2009 CE-LVD: EN 61347-2-13: 2014/A1: 2017, EN 61347-1: 2015, EN 62493: 2015 RCM: AS 61347.2-13: 2018 CB: IEC 61347-1: 2015, IEC61347-2-3: 2014, IEC 61347-2-13: 2014/AMD1: 2016 CCC: GB19510.1-2009, GB19510.14-2009
	EMI	CE-EMC/RCM: EN55015, EN61000-3-2, EN61000-3-3 CCC:GB/T17743, GB17625.1, GB17625.2
	EMS	CE-EMC/RCM: EN61000-4-2, 3, 4, 5 (lightning strike 1kV), 6, 11 CCC: GB/T17626.2, 3, 4, 5 (lightning strike 1kV), 6, 11
Others	IP Rating	IP20
	RoHS	RoHS 2.0 (EU) 2015/863
	Warranty Condition	5 years (Tc≤77.5℃)
	DALI Standard	IEC 62386-101 102 207: DALI 2.0
Remarks	<ol style="list-style-type: none"> 1. It is recommended that customer should install over voltage, under voltage and surge protection devices in the power supply circuits of the light fixtures to ensure safety before connecting to electricity. 2. When adjusting the output current via the DIP switch, please disconnect input AC power supply first so as to use the DIP switch without the input AC power supply connected. 3. The PC cover, casing, end caps and other parts of the LED driver inside the LED light fixture must conform to UL94-V0 flammability standard or above. 4. As an accessory, the LED driver is not the only factor determining the EMC performance of the LED light fixture. The structure and the wiring of the light fixture are also relevant. Thus it's strongly recommended the LED light fixture manufacturer should re-confirm the EMC of the whole LED light fixture. 5. Unless otherwise stated, the parameters above are test results under these conditions: ambient temperature 25℃, humidity 50%, 100% load, maximum output current and input voltage 230Vac. 	

Product Characteristic Curves


■ **PF Curve**

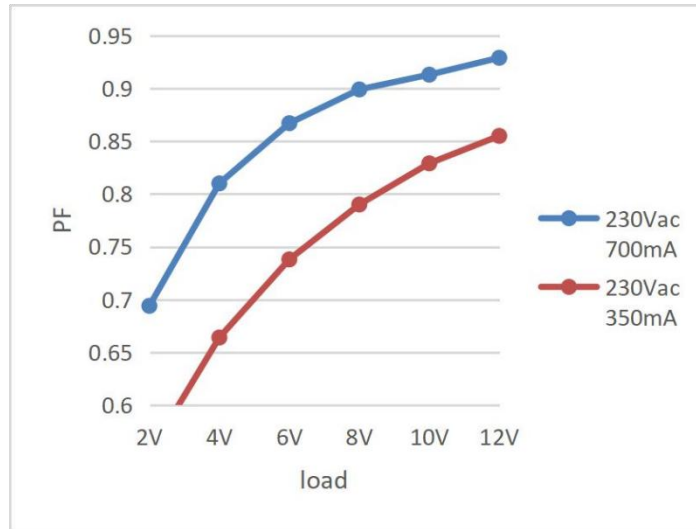

■ **Efficiency Curve**

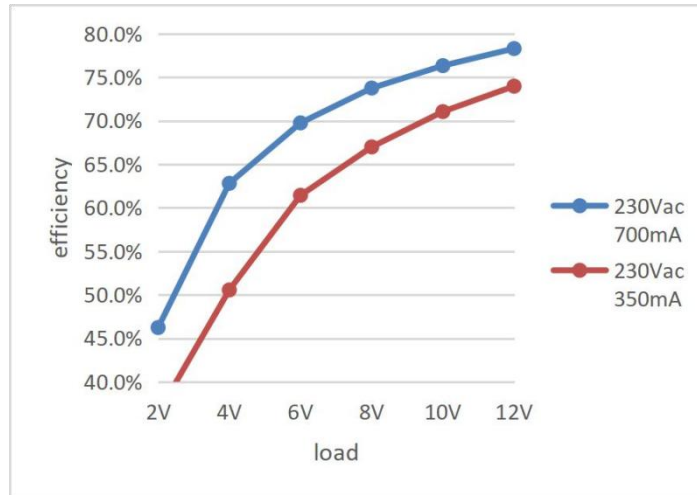

■ **Lifetime Curve**

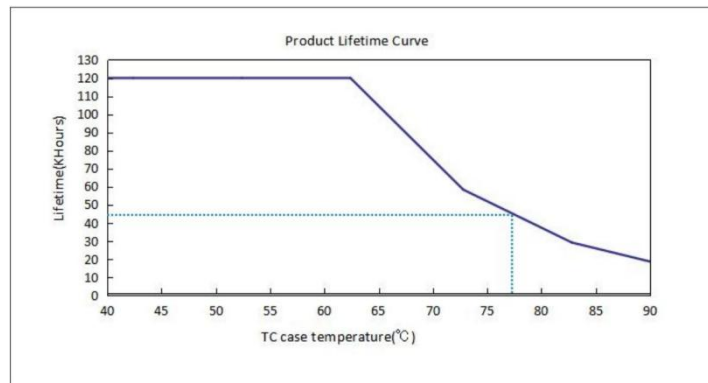

Dimming Operation Instructions

■ Product Terminals

INPUT

DA1	Input terminal of DA1 dimming
DA2	Input terminal of DA2 dimming
AC-L	Input terminal of AC live wire
AC-N	Input terminal of AC neutral wire

OUTPUT


LED+	Positive electrode output of the driver
LED-	Negative electrode output of the driver

■ Product DIP Switch

Vo DC	I rated (CC)	1	2	3
2-12V	700mA	OFF	OFF	OFF
2-12V	650mA	OFF	OFF	ON
2-12V	600mA	OFF	ON	OFF
2-12V	550mA	OFF	ON	ON
2-12V	500mA	ON	OFF	OFF
2-12V	450mA	ON	OFF	ON
2-12V	400mA	ON	ON	OFF
2-12V	350mA	ON	ON	ON

Remark: except the settings mentioned in the table above, other DIP switch settings are default to be the maximum current 700mA.

■ Wiring Diagram of PUSH Dimming

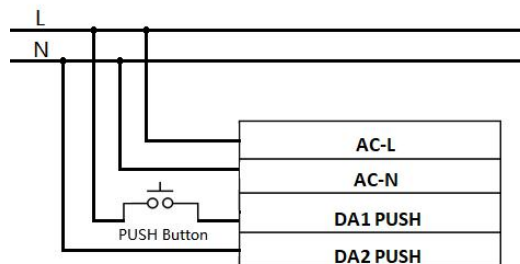

Remark: when using PUSH dimming function, please make sure to power on AC-L/AC-N before powering on the PUSH terminal, otherwise the PUSH terminal may be burnt out.



■ PUSH Dimming Operation Instructions

Operations	Operation Time	Functions
Instant Push	0.1-0.5 sec	Light on / off
Long Push	0.6-9 sec	Dim up / down
Reset Push	> 9 sec	Reset to PUSH 50% brightness

- The PUSH operation won't cause any variations if it's less than 0.1S.
- Connect the PUSH switch in series between AC-L terminal and DA1 terminal; short circuit AC-N and DA2 terminals.
- Minimum dimming depth of PUSH dimming: 1% (lout)
- The PUSH dimming mode has the memory function in case of any power failure. Power on the driver again and the light will return to the state before the power failure.
- Maximum wire length between the PUSH switch and the farthest LED driver: 135m;
wire diameter: 16-22AWG
- Maximum quantity of LED driver connected in parallel in DALI dimming and PUSH dimming modes: 64

■ DALI Dimming Operation Instructions

- Default setting: 100% brightness.
- Connect the DALI signal to DA1 and DA2 terminals.
- DALI protocol includes 16 groups and 64 IP addresses.
- Minimum dimming depth of DALI dimming: 0.1% (lout).

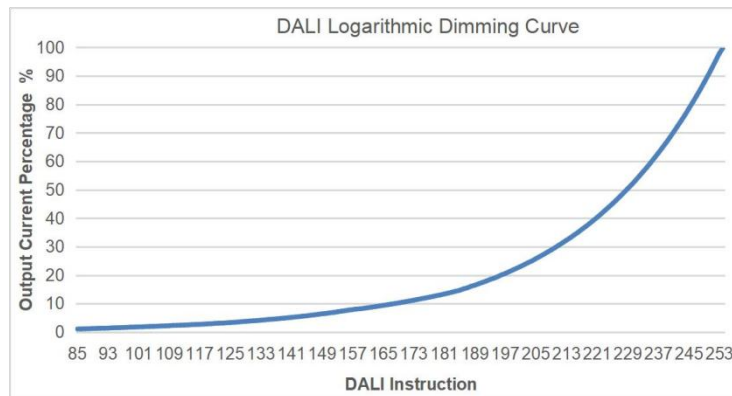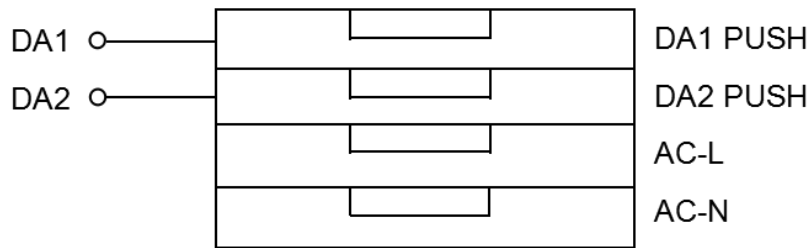

⚠ Remark: DALI and PUSH dimming functions can not be used at the same time, otherwise the DALI dimmer may be damaged.

Label


Lifud LED Driver(LED控制装置) Model: LF-AAD008-0700-12 Preparation for input and output
 Input: 220-240V~50/60Hz Max.0.1A tc:90°C
 U out: 35V= PF:>0.9C P rated:8.4W(Max)
 For LED modules only www.lifud.com Made in China
 For Australia and New Zealand, the marking label with "ON" (中国制造)

INPUT	ta	Vo DC	I rated(CC)	1	2	3
DA1 PUSH	45°C	2-12V	700mA	OFF	OFF	OFF
DA2 PUSH			650mA	OFF	OFF	ON
AC-N			600mA	OFF	ON	OFF
AC-L			550mA	OFF	ON	ON
0.75-1.5			500mA	ON	OFF	OFF
Dimmable			450mA	ON	OFF	ON
0.1%-100%	400mA	ON	ON	OFF		
	350mA	ON	ON	ON		

Output current and setting table

1 2 3 OUTPUT
 LED+
 LED-
 0.5-1.0

Structure & Dimensions (unit: mm)

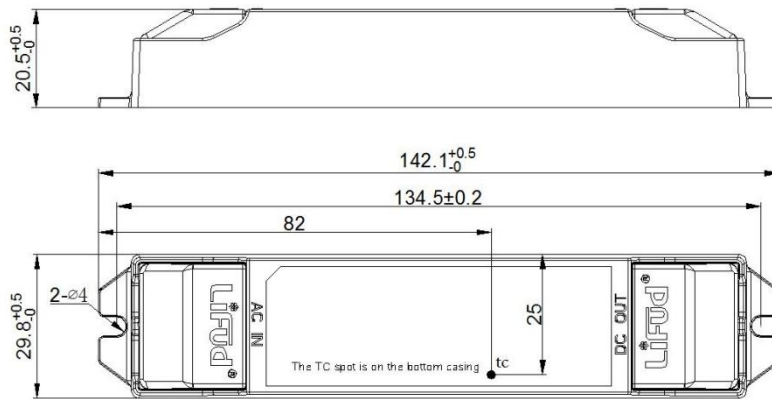

Packaging Specifications

Model	LF-AAD008-0700-12
Packaging Dimensions	385*285*210 mm (L*W*H)
Quantities	14 pcs/layer; 9 layers/ctn; 126 pcs/ctn
Weights	0.065 kg/pc; 9 kg/ctn

Transportation & Storage

■ Transportation

- Suitable transportation means: vehicles, boats and aircraft.
- During transportation, there should be awnings for rain protection and sun protection. Civilized loading and unloading are required. There should be no severe vibration or impact.

■ Storage

- Storage in accordance with the provisions of the Class I environment. For products which have been stored for more than six months, they mustn't be used until they pass the re-inspection.

Attention

- Please use this product according to its specifications otherwise there may be malfunction.
- Use light fixtures that have not been certified or are not compatible with the LED drivers may cause fire or other hazards.
- Man-made damage, any use beyond the specification and non-original-factory modification are not covered by warranty.

Remark: The final interpretation right of the contents of this data sheet belongs to Lifud Technology Co., Ltd.