

Product Description

LF-AAD030-0750-42 is a 31.5W constant current DALI or PUSH dimmable LED driver. Its input voltage ranges from 198 to 264Vac and output current can be adjusted via DIP switch from 400mA to 750mA, in steps of 50mA.

Features

- IP20
- Suitable for Class II light fixtures
- Constant current output and output current adjustable via DIP switch
- DALI or PUSH dimmable; logarithmic or linear dimming curve selectable on DALI interface
- Built-in active PFC function
- Standby power consumption <0.5W
- 0.1% dimming depth
- 5-year warranty (please refer to the warranty condition)




Applications

- Horticultural lighting
- Indoor office lighting
- Decorative lighting
- Commercial lighting
- Residential lighting

Product Naming

LF- AAD030- 0750- 42

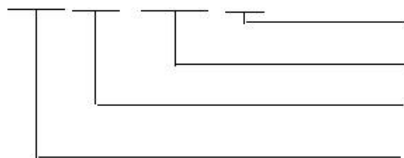

- 42: maximum output voltage: 42V
- 0750: maximum output current: 750mA
- 030: rated power: 30W
- AAD: DALI LED driver


Electrical Characteristics

Model		LF-AAD030-0750-42								
Output	Output Voltage (DC)	9-42V								
	Output Current	Adjustable via DIP switch; please refer to the DIP Switch Table								
		400mA	450mA	500mA	550mA	600mA	650mA	700mA	750mA	
	Flicker Index	IEC-Pst ≤ 1 , CIE SVM ≤ 0.9 , modulation depth $\leq 1\%$ Complies with the flicker-free standard (IEEE Std 1789-2015)								
	Ripple Current	$< 5\%$ (rated current)								
	Current Tolerance	$\pm 5\%$								
	Temperature Drift	$\pm 5\%$								
Start-up Time	$< 1.5S@230Vac$									
Input	Input Voltage	220-240Vac (voltage limit: 198-264Vac)								
	DC Input Voltage	180-280Vdc								
	Input Frequency	47Hz-63Hz								
	Input Current	0.3A Max								
	Power Factor	≥ 0.94	≥ 0.95	≥ 0.96	≥ 0.97					
	THD	$\leq 15\%@230Vac$ (narrowband; full load)								
	Efficiency	$\geq 80\%$	$\geq 82\%$	$\geq 84\%$	$\geq 86\%$					
	Inrush Current	$\leq 20A \& 120\mu S@230Vac$								
	Load Quantity Carried by the Circuit Breaker	Circuit Breaker Model	B10		C10		B16		C16	
		Quantity (pcs)	22		22		35		35	
	Surge Protection	L-N: 1kV; PUSH: 600V								
	Leakage Current	$\leq 0.7mA$								
Standby Power Consumption	$\leq 0.5W$ (when DALI OFF signal is effective)									
Protections	Open Circuit	$< 59V$								
	Short Circuit	Hiccup mode (auto-recovery)								
Environment Descriptions	Working Temperature	$-20^{\circ}C - +45^{\circ}C$								
	Working Humidity	20-90%RH (no condensation)								
	Storage Temperature/Humidity	$-30^{\circ}C - 80^{\circ}C$ (six months under class I environment);								
		10-90%RH (no condensation)								
Atmospheric Pressure	86kPa~106kPa									


Safety & Electromagnetic Compatibility	Certifications	TUV-ENEC, CE, CB, RCM, CCC
	Withstanding Voltage	I/P-O/P: 3.75kV 5mA 60S
	Insulation Resistance	I/P-O/P: >100MΩ@500Vdc
	Safety Standards	ENEC: EN61347-1: 2015, EN 61347-2-13: 2014/A1: 2017, EN 62384: 2016/A1: 2009 CCC: GB19510.1-2009, GB19510.14-2009 RCM: AS61347.2-13: 2018 SAA: AS61347.2-13: 2018 CE-LVD: EN 61347-2-13: 2014/A1: 2017, EN 61347-1: 2015, EN 62493: 2015 CB: IEC 61347-1: 2015, IEC61347-2-3: 2014, IEC 61347-2-13: 2014/AMD1: 2016
	EMI	CE-EMC/RCM: EN55015, EN61000-3-2, EN61000-3-3 CCC:GB/T17743, GB17625.1, GB17625.2
	EMS	CE-EMC/RCM: EN61000-4-2, 3, 4, 5 (lightning strike 1kV), 6, 11 CCC: GB/T17626.2, 3, 4, 5 (lightning strike 1kV), 6, 11
	Others	IP Rating: IP20 RoHS: RoHS 2.0 (EU) 2015/863 Warranty Condition: 5 years (Tc≤82℃) DALI Standard: IEC 62386-101 102 207: DALI 2.0
Remarks	<ol style="list-style-type: none"> 1. It is recommended that customer should install over voltage, under voltage and surge protection devices in the power supply circuits of the light fixtures to ensure safety before connecting to electricity. 2. When adjusting the output current via the DIP switch, please disconnect input AC power supply first so as to use the DIP switch without the input AC power supply connected. 3. The PC cover, casing, end caps and other parts of the LED driver inside the LED light fixture must conform to UL94-V0 flammability standard or above. 4. As an accessory, the LED driver is not the only factor determining the EMC performance of the LED light fixture. The structure and the wiring of the light fixture are also relevant. Thus it's strongly recommended the LED light fixture manufacturer should re-confirm the EMC of the whole LED light fixture. 5. Unless otherwise stated, the parameters above are test results under these conditions: ambient temperature 25℃, humidity 50%, 100% load, maximum output current and input voltage 230Vac. 	

Product Characteristic Curves


■ **PF Curve**

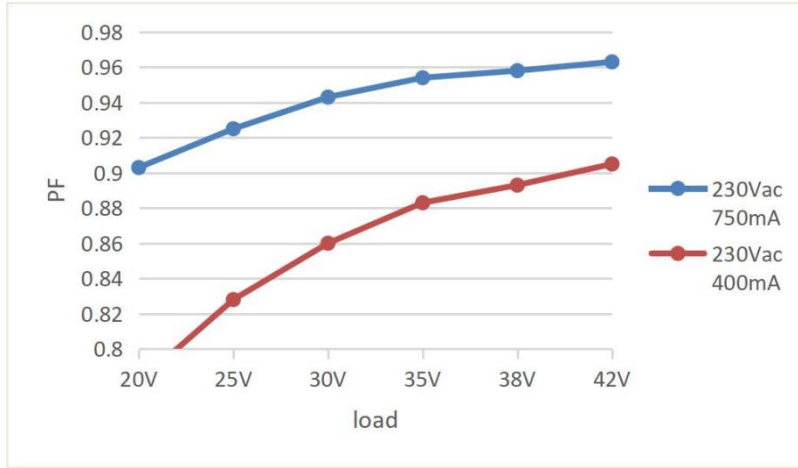

■ **Efficiency Curve**

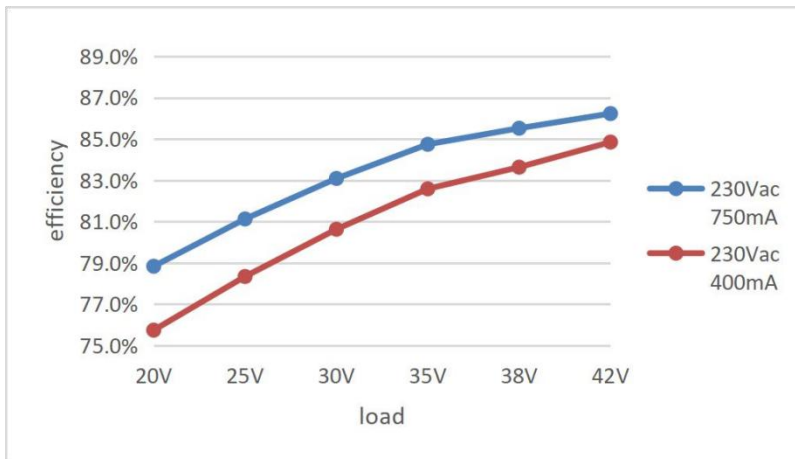

■ **Lifetime Curve**

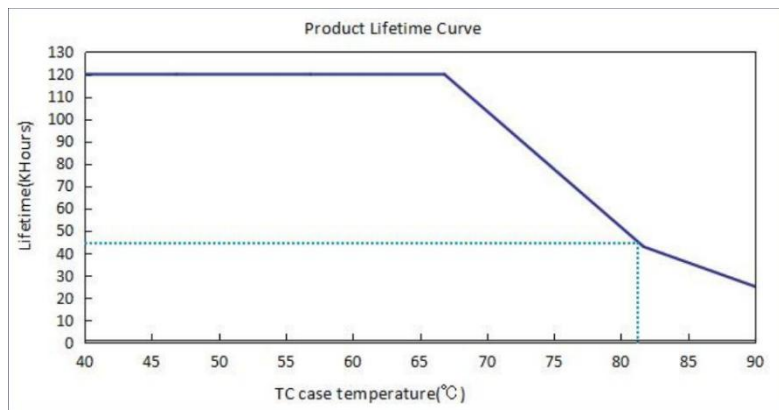

Dimming Operation Instructions

■ Product Terminals

INPUT

DA1 PUSH	Input terminal of DA1 and PUSH dimming
DA2 PUSH	Input terminal of DA2 and PUSH dimming
AC-L	Input terminal of AC live wire
AC-N	Input terminal of AC neutral wire

OUTPUT


LED+	Positive electrode output of the driver
LED-	Negative electrode output of the driver

■ Product DIP Switch

I rated (CC)	1	2	3	4
750mA	OFF	OFF	OFF	OFF
700mA	OFF	OFF	OFF	ON
650mA	OFF	OFF	ON	OFF
600mA	OFF	OFF	ON	ON
550mA	OFF	ON	OFF	OFF
500mA	OFF	ON	OFF	ON
450mA	OFF	ON	ON	OFF
400mA	OFF	ON	ON	ON

Remark: except the settings mentioned in the table above, other DIP switch settings are default to be the maximum current 750mA.

■ Wiring Diagram of PUSH Dimming

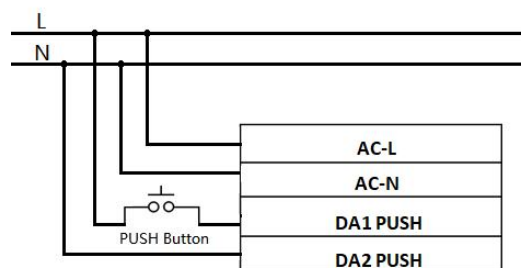

Remark: when using PUSH dimming function, please make sure to power on AC-L/AC-N before powering on the PUSH terminal, otherwise the PUSH terminal may be burnt out.



■ PUSH Dimming Operation Instructions

Operations	Operation Time	Functions
Instant Push	0.1-0.5 sec	Light on / off
Long Push	0.6-9 sec	Dim up / down
Reset Push	> 9 sec	Reset to PUSH 50% brightness

- The PUSH operation won't cause any variations if it's less than 0.1S.
 - Connect the PUSH switch in series between AC-L terminal and DA1 terminal; short circuit AC-N and DA2 terminals.
 - Minimum dimming depth of PUSH dimming: 1% (lout)
 - The PUSH dimming mode has the memory function in case of any power failure. Power on the driver again and the light will return to the state before the power failure.
 - Maximum wire length between the PUSH switch and the farthest LED driver: 135m;
- wire diameter: 16-22AWG
- Maximum quantity of LED driver connected in parallel in DALI dimming and PUSH dimming modes: 64

■ DALI Dimming Operation Instructions

- Default setting: 100% brightness.
- Connect the DALI signal to DA1 and DA2 terminals.
- DALI protocol includes 16 groups and 64 IP addresses.
- Minimum dimming depth of DALI dimming: 0.1% (lout).

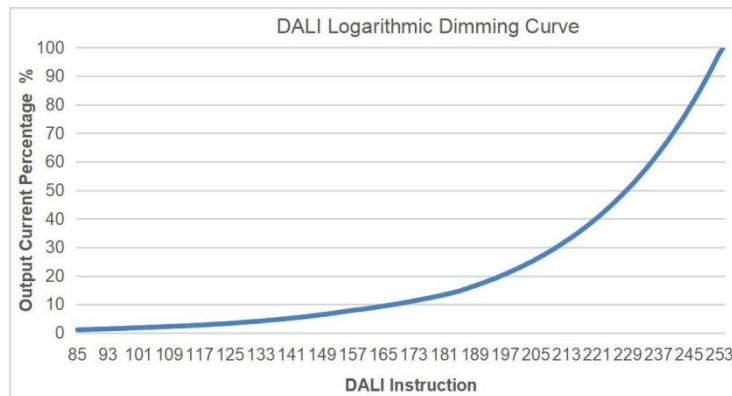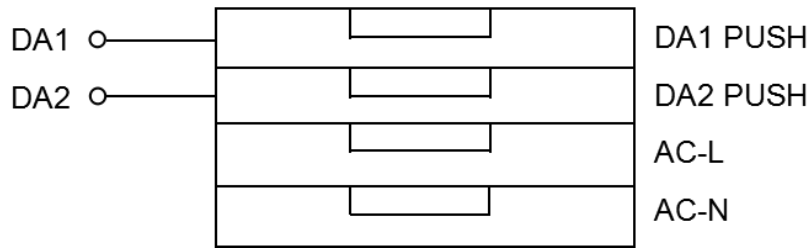

⚠ Remark: DALI and PUSH dimming functions can not be used at the same time, otherwise the DALI dimmer may be damaged.

Label

Lifud[®] LED Driver(LED控制装置) Model: LF-AAD030-0750-42
 Input: 220-240V ~ 50/60Hz Max.0.3A
 U out: 59V = PF:>0.9C P rated:31.5W(Max)
 For Australia and New Zealand,the marking label with "X"

INPUT
 DA 1 PUSH
 DA 2 PUSH
 AC-L
 AC-N
 0.75-1.5 □
 Dimmable
 0.1%-100%


Output current and setting table tc:90°C

ta	Vo DC	I rated(CC)	1	2	3	4
45°C	9-42V	750mA	OFF	OFF	OFF	OFF
		700mA	OFF	OFF	OFF	ON
		650mA	OFF	OFF	ON	OFF
		600mA	OFF	OFF	ON	ON
		550mA	OFF	ON	OFF	OFF
		500mA	OFF	ON	OFF	ON
		450mA	OFF	ON	ON	OFF
		400mA	OFF	ON	ON	ON

Preparation for input and output
 17.5mm
 For LED modules only
 www.lifud.com
 Made in China
 (中国制造)

OUTPUT
 LED+
 LED-
 0.5-1.0 □

Structure & Dimensions (unit: mm)

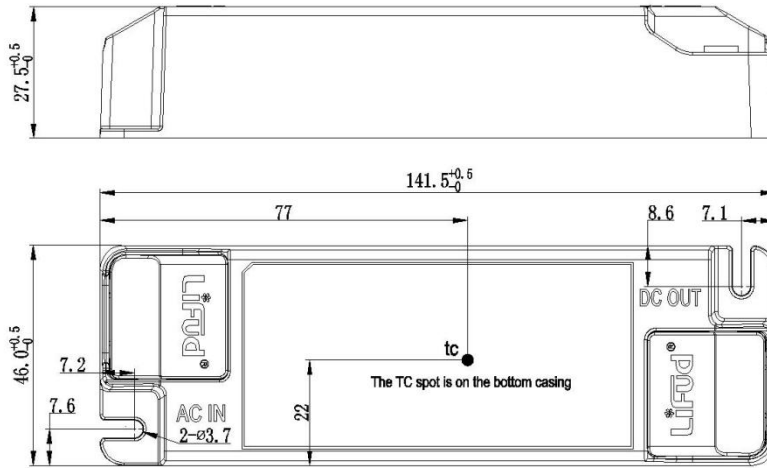

Packaging Specifications

Model	LF-AAD030-0750-42
Packaging Dimensions	385*285*210 mm (L*W*H)
Quantities	10 pcs/layer; 6 layers/ctn; 60 pcs/ctn
Weights	0.1355 kg/pc; 9.13 kg/ctn

Transportation & Storage

■ Transportation

- Suitable transportation means: vehicles, boats and aircraft.
- During transportation, there should be awnings for rain protection and sun protection. Civilized loading and unloading are required. There should be no severe vibration or impact.

■ Storage

- Storage in accordance with the provisions of the Class I environment. For products which have been stored for more than six months, they mustn't be used until they pass the re-inspection.

Attention

- Please use this product according to its specifications otherwise there may be malfunction.
- Use light fixtures that have not been certified or are not compatible with the LED drivers may cause fire or other hazards.
- Man-made damage, any use beyond the specification and non-original-factory modification are not covered by warranty.

Remark: The final interpretation right of the contents of this data sheet belongs to Lifud Technology Co., Ltd.