

## Product Description

LF-GSD080YE is an 80W constant current DALI or PUSH dimmable LED driver. Its input voltage ranges from 198 to 264Vac and output current is adjustable via DIP switch from 1550mA to 2000mA with every 50mA as a step.

## Features


- DALI or PUSH dimmable (logarithmic or linear dimming curve selectable on DALI interface)
- IP20
- Metal casing; suitable for Class I light fixtures
- Constant current output and output current adjustable via DIP switch
- Built-in active PFC function
- Standby power consumption <0.5W
- 0.1% dimming depth
- 5-year warranty (please refer to the warranty condition)

## Applications

- Horticultural lighting
- Indoor office lighting
- Decorative lighting
- Commercial lighting
- Residential lighting



## Product Naming

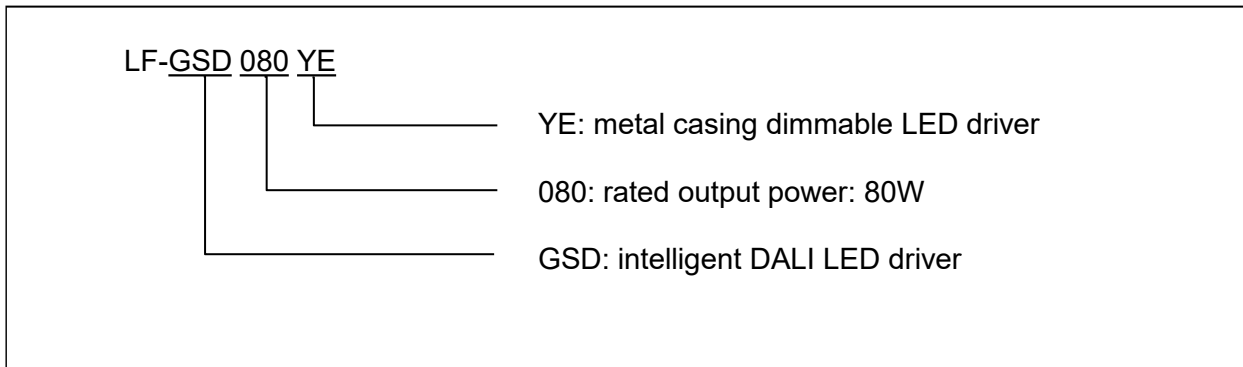


## Electrical Characteristics

| Model                         |  | LF-GSD080YE (0.1% dimming depth)   |         |         |         |         |               |         |         |         |         |
|-------------------------------|--|--|---------|---------|---------|---------|---------------|---------|---------|---------|---------|
| <b>Output</b>                 | Output Voltage                               | 25-42V   |         |         |         |         |               |         |         |         |         |
|                               | Output Current                               | The output current can be adjusted via DIP switch.<br>Please refer to the DIP switch table.                                      |         |         |         |         |               |         |         |         |         |
|                               |  | 1550 mA  | 1600 mA | 1650 mA | 1700 mA | 1750 mA | 1800 mA       | 1850 mA | 1900 mA | 1950 mA | 2000 mA |
|                               | Flicker Index                                | IEC-Pst $\leq$ 1, CIE SVM $\leq$ 0.4, Modulation Depth $\leq$ 1%<br>Complies with the flicker-free standard (IEEE Std 1789-2015) |         |         |         |         |               |         |         |         |         |
|                               | Ripple Current                               | $<5\%$ (rated current)   |         |         |         |         |               |         |         |         |         |
|                               | Current Tolerance                            | $\pm 5\%$  |         |         |         |         |               |         |         |         |         |
|                               | Temperature Drift                            | $\pm 10\%$   |         |         |         |         |               |         |         |         |         |
|                               | Start-up Time                                | $<1.4S@230Vac$   |         |         |         |         |               |         |         |         |         |
| <b>Input</b>                  | Input Voltage                                | 220-240Vac (voltage limit : 198-264Vac)  |         |         |         |         |               |         |         |         |         |
|                               | DC Input Voltage                             | 310-340Vdc (voltage limit : 280-374Vdc)  |         |         |         |         |               |         |         |         |         |
|                               | Input Frequency                              | 47-63Hz  |         |         |         |         |               |         |         |         |         |
|                               | Input Current                                | 0.55A max.   |         |         |         |         |               |         |         |         |         |
|                               | Power Factor                                 | $\geq 0.9$   |         |         |         |         |               |         |         |         |         |
|                               | THD  | $\leq 20\%@230Vac$ (DC42V full load)   |         |         |         |         |               |         |         |         |         |
|                               | Efficiency                                   | $\geq 88\%$  |         |         |         |         | $\geq 87.5\%$ |         |         |         |         |
|                               | Inrush Current                               | $\leq 80A@350\mu S@230Vac$ (max.)  |         |         |         |         |               |         |         |         |         |
|                               | Load Quantity Carried by the Circuit Breaker | Circuit Breaker Model  | B10     |         | C10     |         | B16           |         | C16     |         |         |
|                               |  | Quantity (pcs)   | 12      |         | 12      |         | 19            |         | 19      |         |         |
|                               | Surge Protection                             | L-N: 1kV; L-N-GND: 2kV; PUSH: 600V   |         |         |         |         |               |         |         |         |         |
|                               | Leakage Current                              | $\leq 0.7mA$   |         |         |         |         |               |         |         |         |         |
|                               | Stand-by Power Consumption                   | $\leq 0.5W$ (when DALI OFF signal is effective)  |         |         |         |         |               |         |         |         |         |
| <b>Protective Features</b>    | Open-Circuit Protection                      | $<55V$   |         |         |         |         |               |         |         |         |         |
|                               | Short-Circuit Protection                     | Hiccup mode (auto-recovery)  |         |         |         |         |               |         |         |         |         |
| <b>Environment Conditions</b> | Operating Temperature                        | $-30^{\circ}C - +50^{\circ}C$  |         |         |         |         |               |         |         |         |         |
|                               | Operating Humidity                           | 20-90%RH (no condensation)   |         |         |         |         |               |         |         |         |         |
|                               | Storage Temperature/Humidity                 | $-30^{\circ}C - 80^{\circ}C$ (six months under class I environment);<br>10-90%RH (no condensation)                               |         |         |         |         |               |         |         |         |         |
|                               | Atmospheric Pressure                         | 86-106kPa  |         |         |         |         |               |         |         |         |         |


|   |  |   |
|---|--|---|
| <b>Safety &amp; Electromagnetic Compatibility</b> | Certifications   | TUV-ENEC, CE, CB, RCM, CCC  |
|   | Withstanding Voltage   | I/P-O/P (LED): 3.75kVac, O/P(LED)-O/P(DIM): 500Vac,<br>I/P-O/P(DIM): 500Vac   |
|   | Insulation Resistance  | I/P-O/P: >100MΩ@500Vdc  |
|   | Safety Standards   | ENEC: EN61347-1: 2015, EN 61347-2-13: 2014/A1: 2017,<br>EN 62384: 2016/A1: 2009;<br>CE-LVD: EN 61347-2-13: 2014/A1: 2017, EN 61347-1: 2015,<br>EN 62493: 2015;<br>RCM: AS 61347.2-13: 2018;<br>CB: IEC 61347-1: 2015, IEC61347-2-3: 2014,<br>IEC 61347-2-13: 2014/AMD1: 2016;<br>CCC: GB19510.1-2009, GB19510.14-2009 |
|   | EMI  | CE-EMC/RCM: EN55015, EN61000-3-2, EN61000-3-3<br>CCC:GB/T17743, GB17625.1, GB17625.2  |
|   | EMS  | CE-EMC/RCM: EN61000-4-2, 3, 4, 5, 6, 11<br>CCC: GB/T17626.2, 3, 4, 5, 6, 11   |
| <b>Others</b>                                     | IP Rating  | IP20  |
|   | RoHS   | RoHS 2.0 (EU) 2015/863  |
|   | Warranty Condition   | 5 yrs (TC≤77°C)   |
|   | DALI Standard  | IEC 62386-101 102 207: DALI 2.0   |
| <b>Remarks</b>                                    | <ol style="list-style-type: none"> <li>1. It is recommended that customer should install overvoltage and undervoltage protection devices and surge protection devices in the power supply circuits of the light fixtures to ensure safety before connecting to electricity.</li> <li>2. When adjusting the output current via the DIP switch, please disconnect input AC power supply first so as to use the DIP switch without the input AC power supply connected.</li> <li>3. The PC cover, casing, end caps and other parts of the LED driver inside the LED light fixture must conform to UL94-V0 flammability standard or above.</li> <li>4. As an accessory, the LED driver is not the only factor determining the EMC performance of the LED light fixture. The structure and the wiring of the light fixture are also relevant. Thus it's strongly recommended the LED light fixture manufacturer should re-confirm the EMC of the whole LED light fixture.</li> <li>5. Unless otherwise stated, the parameters above are test results under these conditions: ambient temperature 25°C, humidity 50%, input voltage 230Vac and 100% load.</li> </ol> |   |

Product Characteristic Curves


■ PF Curve

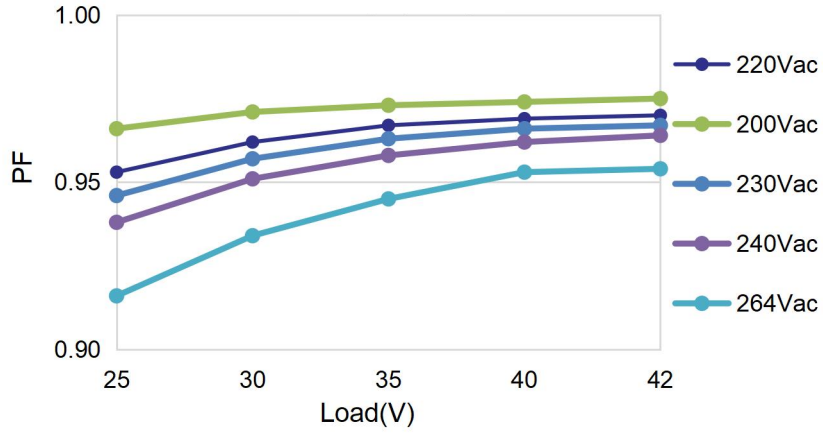

■ Efficiency Curve

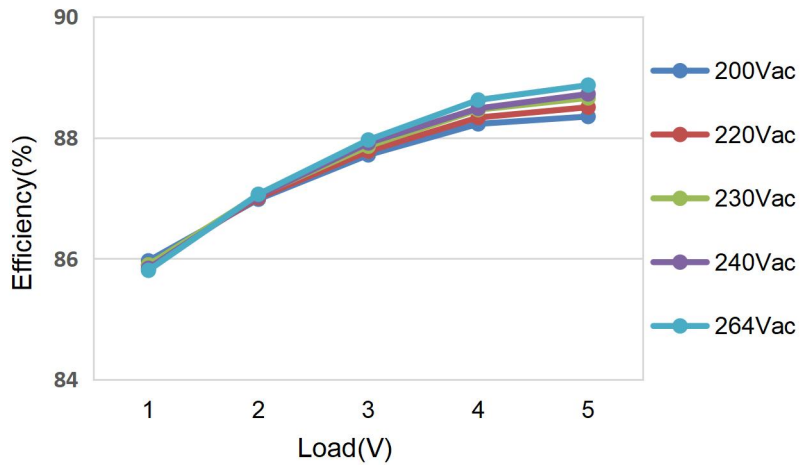

■ Lifetime Curve

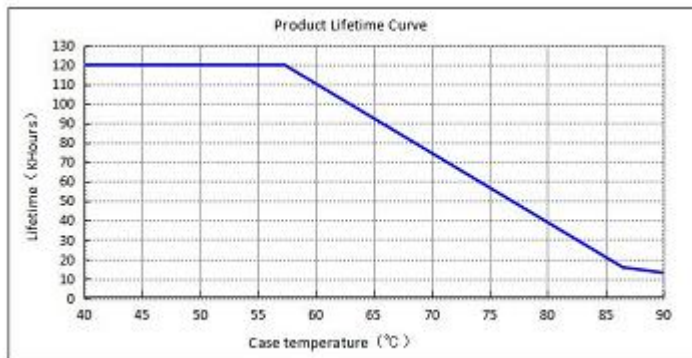

## Dimming Operation Instructions

### ■ Definition of Driver's Terminals

#### INPUT

|          |  |
|----------|--|
| AC-L     | Input terminal of AC live wire         |
| AC-N     | Input terminal of AC neutral wire      |
| NC       | Vacant                                 |
|          | Grounding wire                         |
| DA1 PUSH | Input terminal of DA1 and PUSH dimming |
| DA2 PUSH | Input terminal of DA2 and PUSH dimming |

#### OUTPUT


|      |   |
|------|---|
| LED+ | Positive electrode output of the driver |
| LED- | Negative electrode output of the driver |

### ■ Definition of DIP Switch

| I rated (CC) | 1  | 2  | 3  | 4  |
|--------------|----|----|----|----|
| 2000mA       | —  | —  | —  | —  |
| 1950mA       | —  | —  | —  | ON |
| 1900mA       | —  | —  | ON | —  |
| 1850mA       | —  | —  | ON | ON |
| 1800mA       | —  | ON | —  | —  |
| 1750mA       | —  | ON | —  | ON |
| 1700mA       | —  | ON | ON | —  |
| 1650mA       | —  | ON | ON | ON |
| 1600mA       | ON | —  | —  | —  |
| 1550mA       | ON | —  | —  | ON |

Remark: except the known DIP switch modes, the default value of other DIP switch modes is 2000mA (max).

### ■ Wiring Diagram of PUSH Dimming

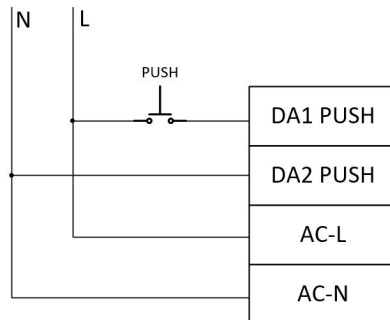

1. The PUSH switch shall be connected in series between AC-L and DALI PUSH terminals and DA2 PUSH terminal shall be connected to AC-N.
2. AC-L and AC-N cannot be directly connected to DA1 PUSH and DA2 PUSH terminals.
3. Before the mains are connected, please ensure that the PUSH switch is disconnected. After that, the PUSH operation can be performed.
4. Before the mains are disconnected, please ensure that the PUSH switch is disconnected.
5. If you have any questions about the connection mode and the operation method, please confirm with FAE of our company.

**If the wiring method or the operation method is incorrect, the LED driver may be damaged.**


■ **Instructions of PUSH dimming**


| Operations   | Operation Time | Functions                |
|--------------|----------------|--------------------------|
| Instant Push | 0.1 ~ 0.5 sec  | Light on / off           |
| Long Push    | 0.6 ~ 10 sec   | Dim up / down            |
| Reset Push   | > 11 sec       | Reset to 100% brightness |

- The PUSH operation won't cause any variations if it's less than 0.05 sec.
- Minimum dimming depth of PUSH dimming: 1% (lout).
- The PUSH dimming mode has the memory function in case of any power failure. Power the driver again and the light will return to the state before the power failure.
- Maximum wire length between the PUSH switch and the farthest LED driver: 135m; wire diameter: 16-22AWG
- Maximum quantity of LED drivers connected in parallel in DALI dimming and PUSH dimming modes: 64

■ **Instructions of DALI dimming**

- Default setting: 100% brightness.
- Connect DALI signal to DA1 and DA2 terminals.
- DALI protocol includes 16 groups and 64 IP addresses.
- Minimum dimming depth of DALI dimming: 0.1% (lout)

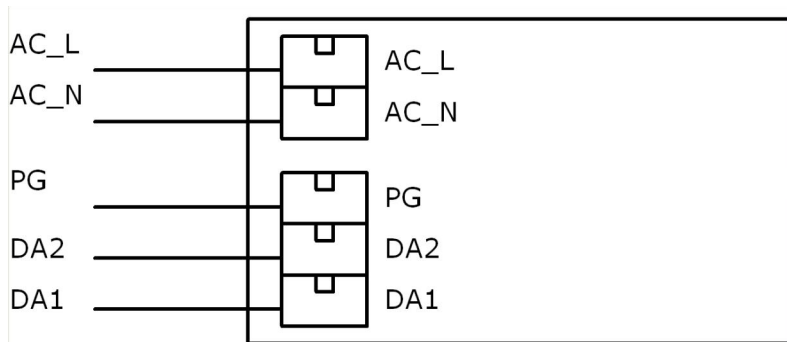

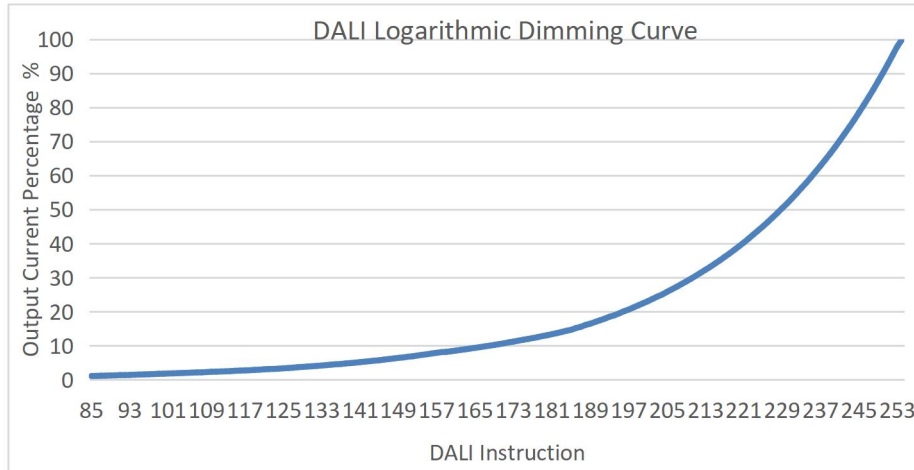


**⚠** The DALI dimming function and the PUSH dimming function cannot be used at the same time, otherwise the DALI dimmer may be damaged.

**Label**

|   |   |   |  |  |   |  |
|---|---|---|--|--|---|--|
| <b>INPUT</b><br>AC-L<br>AC-N<br>NC<br>PE<br>DALI DIM+<br>DALI DIM-<br>0.75-1.5p | <b>LIFUD®</b><br>UN: 220-240V ~ In: 0.55A<br>F <sub>n</sub> : 50/60Hz<br>Output Voltage: 24-40V<br>U <sub>out</sub> : 55V<br>PF: 0.95<br>Prated: 84W(Max)<br>T <sub>c</sub> : 90°C<br>T <sub>a</sub> : 50°C | <b>LED Driver</b><br>Model: LF-GSD080YE<br>For LED modules only |  | Dimming (CU) 1 2 3 4<br>1000mA ON - - - ON<br>1000mA ON - - - ON<br>1000mA ON ON ON ON<br>1000mA ON ON ON ON<br>1000mA ON ON ON ON<br>1000mA ON ON ON ON<br>1000mA ON ON ON ON<br>1000mA ON ON ON ON<br>1000mA ON ON ON ON | Preparation for input and output<br>7.5mm<br>www.lifud.com<br>Made in China | <b>OUTPUT</b><br>LED+<br>LED-<br>0.5-1.0p<br>ON 1 2 3 4<br>OFF 1 1 1 1 |
|   |   |   |  | CE<br>SELV   |   |  |
|   |   |   |  | DALI   |   |  |
|   |   |   |  | DALI   |   |  |

**Structure & Dimensions (unit: mm)**

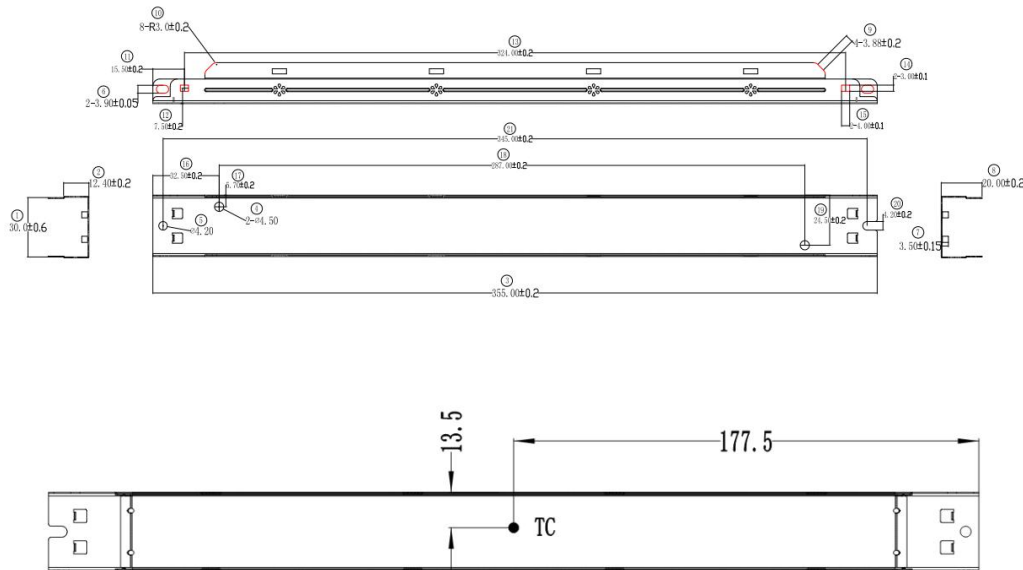

## Packaging Specifications

|                     |                                       |
|---------------------|---------------------------------------|
| Model               | LF-GSD080YE                           |
| Packaging Dimension | 420*300*215 mm (L*W*H)                |
| Quantity            | 6 pcs/layer; 5 layers/ctn; 30 pcs/ctn |
| Weight              | 0.320 kg/pc; 10.44 kg/ctn             |

## Transportation & Storage

### ■ Transportation

- Suitable transportation means: vehicles, boats and aircraft.
- During transportation, there should be awnings for rain protection and sun protection. Civilized loading and unloading are required. There should be no severe vibration or impact.

### ■ Storage

- Storage in accordance with the provisions of Class I environment. For products which have been stored for more than six months, they mustn't be used until they pass the re-inspection.

## Attention

- Please use this product according to its specifications otherwise there may be malfunction.
- Use light fixtures that have not been certified or are not compatible with the LED drivers may cause fire or other hazards.
- Man-made damage, any use beyond the specification and non-original-factory modification are not covered by warranty.

Remark: The final interpretation right of the contents of this data sheet belongs to Lifud Technology Co., Ltd.