


Features

- Constant current output and current adjustable via DIP switch
- All-round protections: short circuit, over load, no load and anti-reverse connection
- Compact size
- 5-year warranty (please refer to the warranty condition)

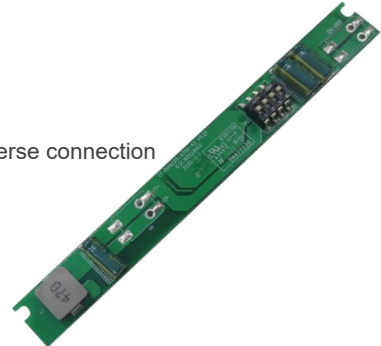

Applications


· Horticultural lighting · indoor office lighting · decorative lighting · commercial lighting · residential lighting

Descriptions

LF-BAN016-0400-42 is a 16W constant current LED driver. Its rated input voltage is $48V_{dc} \pm 5\%$ and output current can be adjusted via DIP switch from 100 to 400mA with every 50mA as a step. It features compact size, built-in design (inside the magnetic track box) and high efficiency.

Product Model

LF - BAN 016 - 0400 - 42

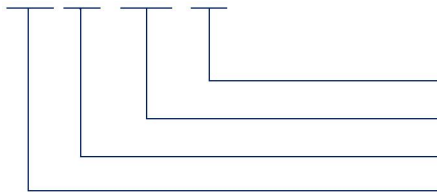

- 42: maximum output voltage: 42V
- 0400: maximum output current: 400mA
- 016: rated power: 16W
- BAN: CC non-dimmable LED driver

Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China.

Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China.

Website: www.lifud.com Telephone: +86(0)755 8373 9299 Email: sales@lifud.com

■ Electrical Characteristics


Model		LF-BAN016-0400-42						
Environment Descriptions	Output Current	Adjustable via DIP switch						
		100mA	150mA	200mA	250mA	300mA	350mA	400mA
	Output Voltage	9-42V ($V_{in}-V_o \geq 7V$)						
	Output Power	16.8W max.						
	Flicker Index	IEC-Pst ≤ 1 , CIE SVM ≤ 0.9 , modulation depth $\leq 1\%$ Complies with flicker-free standard: IEEE Std 1789-2015						
Current Tolerance	$\pm 20mA$							
Input	Input Voltage	48Vdc $\pm 5\%$ (positive or negative electrode not necessary to be identified)						
	Input Current	0.45A max.						
	Efficiency	$\geq 88\%$	$\geq 90\%$					$\geq 91\%$
Protections	Short Circuit	Auto-recovery						
	Over Load	The output current decreases when the actual voltage exceeds the output voltage and automatically recovers after the load is lightened.						
	No Load	The driver cannot be easily damaged (no-load voltage $\leq 59V$).						
	Anti-reverse Connection	When the input of driver is reversely connected, its output is of no abnormalities.						
Environment Descriptions	Operating Temperature	$-20^{\circ}C - +60^{\circ}C$						
	Operating Humidity	20-90%RH (without condensation)						
	Storage Temperature/ Humidity	$-30^{\circ}C - 80^{\circ}C$ (6 months in Class I environment); 10-90%RH (without condensation)						
	Atmospheric Pressure	86-106kPa						
Other Parameters	IP Rating	IP20						
	RoHS	RoHS 2.0 (EU) 2015/863						
	Warranty Condition	5 years						
Testing Equipment	Digital power meter: CHROMA66202, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber; Everfine EMS61000-5B; Everfine EMS61000-4A, spectroanalyzer: KH3935, flicker tester (flicker-free coefficient test): 60N-01, etc.							
Testing Remarks	If there are no special remarks, the above parameters are tested at the ambient temperature of $25^{\circ}C$, humidity of 50%, full load and input voltage of 48Vdc.							

■ **Electrical Characteristics**


Testing Remarks	<ol style="list-style-type: none"> 1. Please disconnect input AC power supply before adjusting the output current via the DIP switch; make sure to use the DIP switch on the condition that the driver is unpowered. 2. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above. 3. Pay attention to keeping the driver away from water, moisture and ESD during application. 4. In order to avoid any abnormalities during driver's application, pay attention that the PCB be insulated from the metal parts of casing.
------------------------	---

■ **Product Characteristic Curves**

Output Current & Voltage Curve

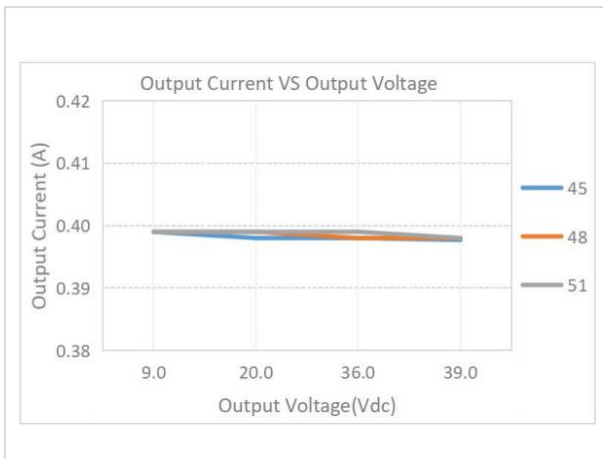

Efficiency Curve

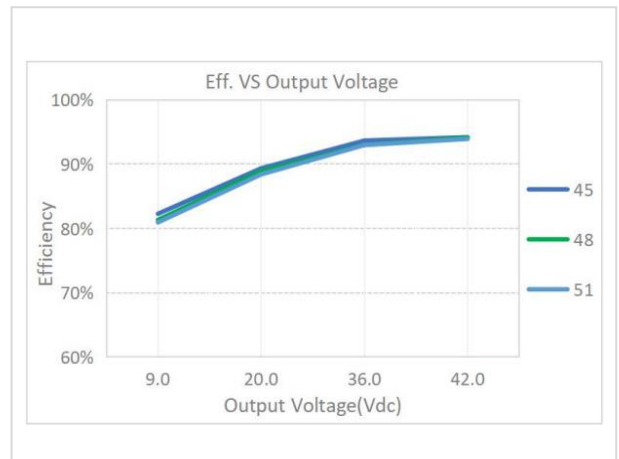


■ **Product Terminal & DIP Switch Definitions**

Product Terminals

INPUT		OUTPUT	
48VIN	DC input terminal (positive or negative electrode not necessary to be identified)	LED+	Positive electrode output of LED driver
48VIN	DC input terminal (positive or negative electrode not necessary to be identified)	LED-	Negative electrode output of LED driver


■ **Product DIP Switch Definitions**

Product DIP Switch (current adjustable via built-in DIP switch)

Current Adjustment Reference Table					
Output Current	1	2	3	4	DIP Switch Diagram
100mA	OFF	OFF	OFF	OFF	
150mA	OFF	OFF	OFF	ON	
200mA	OFF	OFF	ON	ON	
250mA	OFF	ON	ON	OFF	
300mA	OFF	ON	ON	ON	
350mA	ON	ON	ON	OFF	
400mA	ON	ON	ON	ON	

■ **Structure & Dimensions (unit: mm)**

Appearance dimension

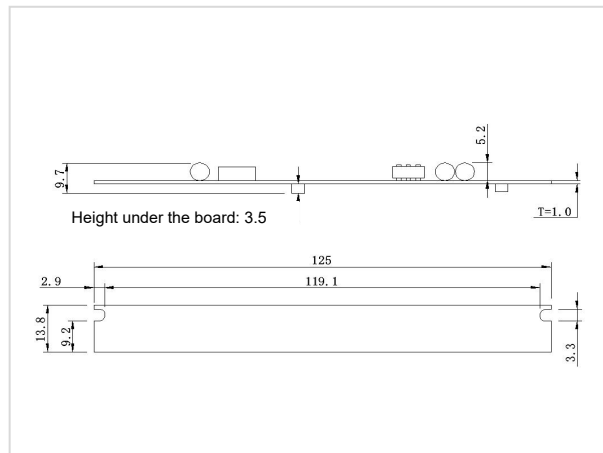

■ **Packaging Specifications**

Model	LF-BAN016-0400-42
Carton Size	385*285*210 mm (L*W*H)
Quantity	20 pcs/layer; 11 layers/ctn; 220 pcs/ctn
Weight	0.01 kg/pc; 3 kg/ctn

■ **Transportation and Storage**

1. Transportation

- Suitable transportation means: vehicles, boats and aeroplanes.
- In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

2. Storage

- The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

Cautions

- Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.
- Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.
- Man-made damage is beyond the scope of Lifud warranty service.

Remark: Lifud Tecnology Co., Ltd. reserves the right to interpret any contents of this specification.