

Features

- Super thin
- High PF; flicker free
- IP20
- Suitable for Class II light fixtures
- 5-year warranty (please refer to the warranty condition)



Applications


· Commercial lighting · indoor office lighting · decorative lighting · residential lighting

Descriptions

LF-GTP040YAxxxxH is a 40W constant current LED driver. Its input voltage ranges from 220 to 240Vac and output current from 800 to 1050mA. It is suitable for super-thin panel light.

Product Model

LF - GTP 040 YA xxxx H

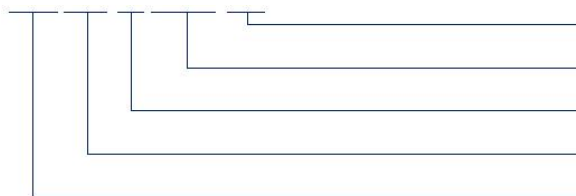

- H: input voltage: 220-240Vac
- xxxx: output current (1050: 1050mA)
- Y: complies with certifications; A: serial number
- 040: output power: 40W
- G: isolated design; TP: super-thin version

■ Electrical Characteristics

Model		LF-GTP040YAxxxxH					
Output	Output Voltage	30-40V					
	Output Current	800mA	850mA	900mA	950mA	1000mA	1050mA
	Flicker Index	Complies with IEEE 1789 standard					
	CIE SVM	≤0.4					
	IEC-Pst	≤1					
	Current Tolerance	±5%					
	Temperature Drift	±10%					
	Start-up Time	<0.5S					
Input	AC Input Voltage	220-240Vac (voltage limit: 198-264Vac)					
	DC Input Voltage	180-264Vdc					
	Input Frequency	47Hz-63Hz					
	Input Current	0.3A max.					
	PF	≥0.95					
	THD	≤15%					
	Efficiency	≥87.5%					
	Inrush Current	≤25A&200uS					
	Loading Quantities of Circuit Breaker	Model	B10	C10	B16	C16	
		Quantity (pcs)	23	27	38	43	
	Leakage Current	≤0.7mA					
Standby Power Consumption	<0.5W						
Protections	Open Circuit	<55V					
	Short Circuit	Hiccup mode (auto-recovery)					
Environment Descriptions	Operating Temperature	-30°C - +40°C					
	Operating Humidity	0-95%RH (no condensation)					
	Storage Temperature/ Humidity	-30°C - +80°C (6 months in Class I environment); 0-95%RH (no condensation)					
	Atmospheric Pressure	86-106kPa					

■ Electrical Characteristics


Safety and EMC	Certifications	ENEC, CE, CB, RCM, UKCA, CCC
	Withstanding Voltage	I/P-O/P: 3.75kV&5mA&60S
	Insulation Resistance	I/P-O/P: >100MΩ@500Vdc
	Safety Standards	ENEC: EN61347-1: 2015, EN 61347-2-13: 2014/A1: 2017, EN 62384: 2016/A1: 2009 CE-LVD: EN 61347-2-13: 2014/A1: 2017, EN 61347-1: 2015, EN 62493: 2015 CB: IEC 61347-1: 2015, IEC61347-2-3: 2014, IEC 61347-2-13: 2014/AMD1: 2016 UKCA-LVD: EN 61347-1: 2015/A1: 2021, EN 61347-2-13: 2014/A1: 2017, EN 62493: 2015 RCM: AS 61347.2-13: 2018 CCC: GB19510.1-2009, GB19510.14-2009
	EMI	CE-EMC/RCM: EN55015, EN61000-3-2: 2018, EN61000-3-3 UKCA-EMC: EN IEC 55015: 2019/A11: 2020, EN 61547: 2009, EN IEC 61000-3-2: 2019/A1: 2021, EN 61000-3-3: 2013/A2: 2021 CCC: GB/T17743, GB17625.1, GB17625.2
EMS	CE-EMC/RCM: EN61000-4-2, 3, 4, 5 (lightning strike 1kV), 6, 11 CCC: GB/T17626.2, 3, 4, 5 (lightning strike 1kV), 6, 11	
Other Parameters	IP Rating	IP20
	RoHS	RoHS 2.0 (EU) 2015/863
	Warranty	5 years (Tc≤77°C)
Testing Equipment	AC power source: CHROMA6530, digital power meter: CHROMA66202, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: EEC SE7440, flicker tester (flicker-free coefficient test): Everfine LFA-3000, etc.	

■ **Electrical Characteristics**


Testing Remark	If there are no special remarks, the above parameters are tested at the ambient temperature of 25°C, humidity of 50%, full load and input voltage of 230Vac/50Hz.
Additional Remarks	<ol style="list-style-type: none"> 1. It is recommended that user install the over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety. 2. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished. 3. The test conditions of the circuit breaker configuration quantity are the same as those of the inrush current. 4. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above.

■ **Product Characteristic Curves**

PF Curve

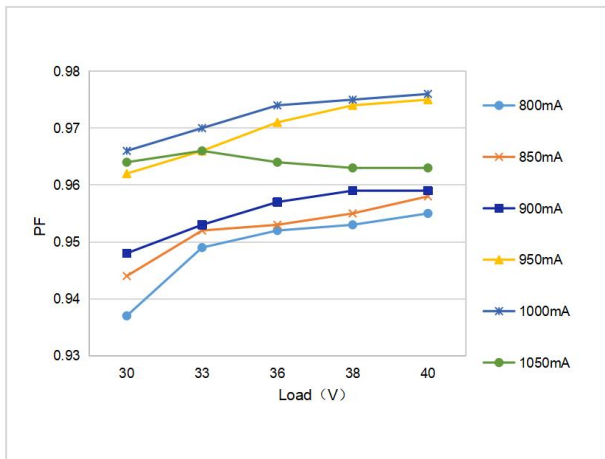


Efficiency Curve

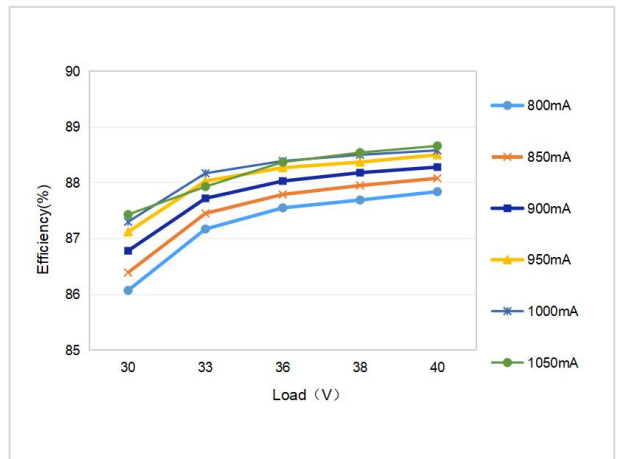


■ **Product Characteristic Curves**

Lifetime Curve

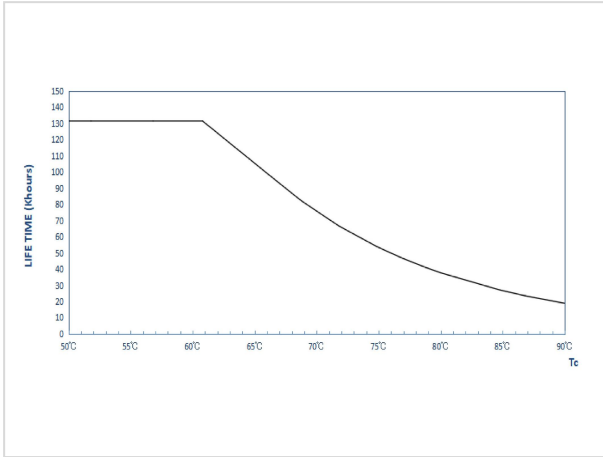

Tc Point Testing Diagram

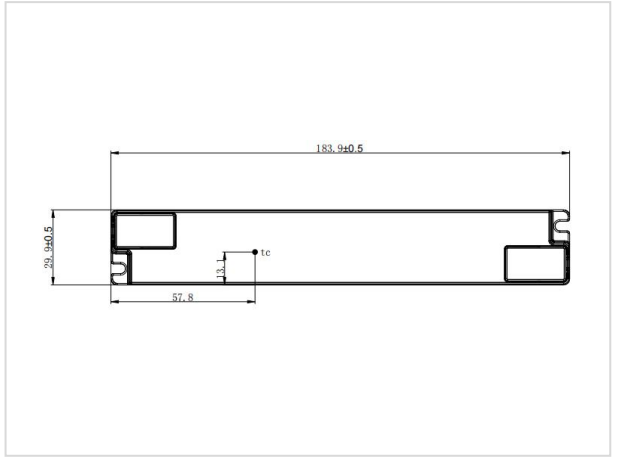

■ **Product Definition**



Product Terminal

INPUT	
AC-N	Input terminal of AC neutral wire
AC-L	Input terminal of AC live wire

OUTPUT	
LED+	Positive Electrode Output of LED Driver
LED-	Negative Electrode Output of LED Driver

■ **Structure & Dimensions (unit: mm)**

Model	Overall Appearance (L*W*H)	Distance Between 2 Positioning Holes (L)	Diameter of Positioning Hole (D)
LF-GTP040YAxxxxH	183.9*29.9*16 mm	176.1 mm	3.8 mm

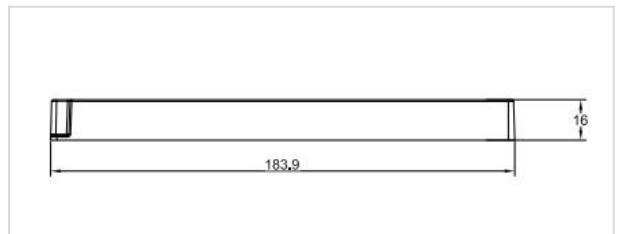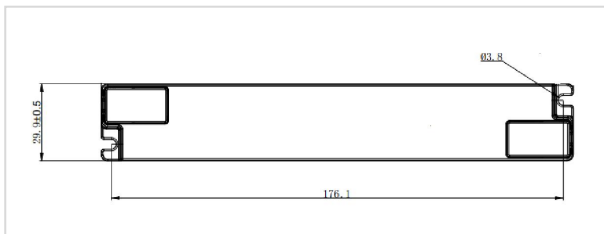

■ **Packaging Specifications**

Model	LF-GTP040YAxxxxH
Carton Size	385*285*210mm (L*W*H)
Quantity	10 pcs/layer; 11 layers/ctn; 110 pcs/ctn
Weight	0.08 kg/pc; 9.7 kg/ctn

■ **Transportation and Storage**

1. Transportation

- Suitable transportation means: vehicles, boats and aeroplanes.
- In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

2. Storage

- The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

Cautions

- Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.
- Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.
- Man-made damage is beyond the scope of Lifud warranty service.

Remark: Lifud Tecnology Co., Ltd. reserves the right to interpret any contents of this specification.