


### Features

- Constant current output and current adjustable via a DIP switch
- DALI 2.0 standard applied
- Flicker free during the whole process of dimming
- Dimming depth: 1%
- All-round protections: short circuit protection, over load protection, no load protection and anti-reverse protection
- Compact size
- 5-year warranty (please refer to the warranty condition.)

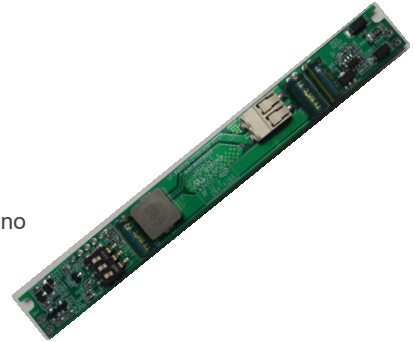

### Applications


· Indoor office lighting · decorative lighting · commercial lighting · residential lighting

### Descriptions

LF-BAD028-0700-42B is a DC/DC constant current DALI dimmable LED driver. Its rated input voltage range is 48Vdc±5% and output current can be adjusted via a DIP switch from 350 to 700mA with every 50mA as a step. It has features of compact size, built-in design (inside the magnetic track box) and high efficiency.

### Product Model

LF - BAD 028 - 0700 - 42B

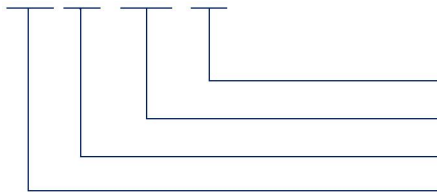

- 42: maximum output voltage: 42V; B: DT6
- 0700: maximum output current: 700mA
- 028: rated power: 28W
- BAD: CC DALI dimmable LED driver

### Lifud Technology Co., Ltd.


Production Base I (HQ): Building B, Kutto Industrial Park, No.26, Xinhe Road, Bao'an District, Shenzhen City, China.  
 Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Area, Meishan City, Sichuan, China.  
 Website: www.lifud.com Telephone: +86(0)755 8373 9299 Email: sales@lifud.com

## ■ Electrical Characteristics


Model		LF-BAD028-0700-42B							
Output	Output Current	Adjustable via a DIP switch							
		350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA
	Output Voltage	9-42V ( $V_{in}-V_o \geq 7V$ )							
	Output Power	29.4W max.							
	Flicker Index	IEC-Pst $\leq 1$ , CIE SVM $\leq 0.9$ , modulation depth $\leq 1\%$ Complies with flicker-free standard: IEEE Std 1789-2015							
	Current Tolerance	$\pm 5\%$							
Temperature Drift	$\pm 10\%$								
Input	Input Voltage	48Vdc $\pm 5\%$ (positive and negative electrodes not identified)							
	Input Current	0.75A max.							
	Efficiency	$\geq 90\%$	$\geq 91\%$	$\geq 92\%$	$\geq 93\%$				
Protections	Short Circuit	Auto-recovery							
	Over Load	The output current decreases when the actual voltage exceeds the output voltage and automatically recovers on the load-lighten condition.							
	No Load	The driver not easily damaged							
	Anti-reverse	Positive and negative electrodes not identified							
Environment Descriptions	Operating Temperature	$-20^{\circ}\text{C} - +60^{\circ}\text{C}$							
	Operating Humidity	20-90%RH (without condensation)							
	Storage Temperature/ Humidity	$-30^{\circ}\text{C} - +80^{\circ}\text{C}$ (6 months in Class I environment); 10-90%RH (without condensation)							
	Atmospheric Pressure	86-106kPa							
Other Parameters	RoHS	RoHS 2.0 (EU) 2015/863							
	Warranty Condition	5 years							
Testing Equipment	Digital power meter: CHROMA66202, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber; Everfine EMS61000-5B: Everfine EMS61000-4A, spectroanalyzer: KH3935, Hi-pot tester: TH9201B, flicker tester (flicker-free coefficient test) 60N-01, etc.								
Remark	The above parameters are tested at the ambient temperature of $25^{\circ}\text{C}$ , humidity of 50%, full load and input voltage of 48Vdc without any special remarks.								
Additional Remarks	<ol style="list-style-type: none"> <li>1. Please disconnect input AC power supply before adjusting the output current via the DIP switch.</li> <li>2. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above.</li> <li>3. Pay attention to keep the driver away from water, moisture and ESD during application.</li> <li>4. In order to avoid any abnormalities during driver's application, pay attention that the PCB be insulated from the metal parts of casing.</li> </ol>								

■ **Product Characteristic Curves**

Output Current & Voltage Curve

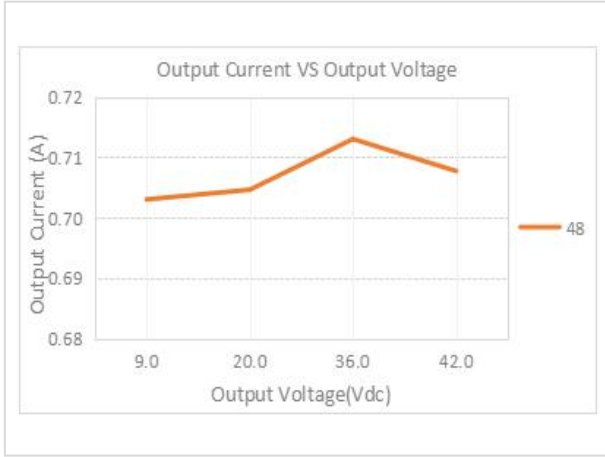

Efficiency Curve

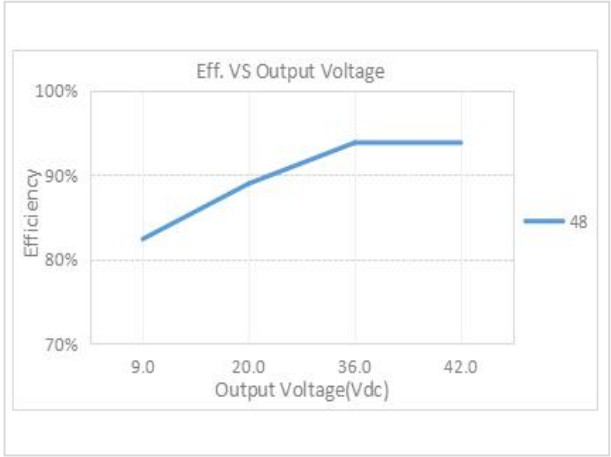


■ **Dimming Operation Instructions**

Product Terminals


INPUT		OUTPUT	
48VIN	DC input terminal (positive and negative electrodes not identified)	LED+	Positive electrode output of LED driver
48VIN	DC input terminal (positive and negative electrodes not identified)		
DA1	DALI 1 dimming input terminal	LED-	Negative electrode output of LED driver
DA2	DALI 2 dimming input terminal		

Current adjustable via a built-in DIP switch

Current Adjustment Reference Table				
Output Current	1	2	3	DIP Switch Diagram
700mA	OFF	OFF	OFF	
650mA	OFF	OFF	ON	
600mA	OFF	ON	OFF	
550mA	OFF	ON	ON	
500mA	ON	OFF	OFF	
450mA	ON	OFF	ON	
400mA	ON	ON	OFF	
350mA	ON	ON	ON	


**DALI dimming operations**

- Default setting: 100% brightness
- Connect DALI signal to DA1 and DA2 terminals
- DALI protocol includes 16 groups and 64 IP addresses
- Minimum dimming depth: 1% (lout)

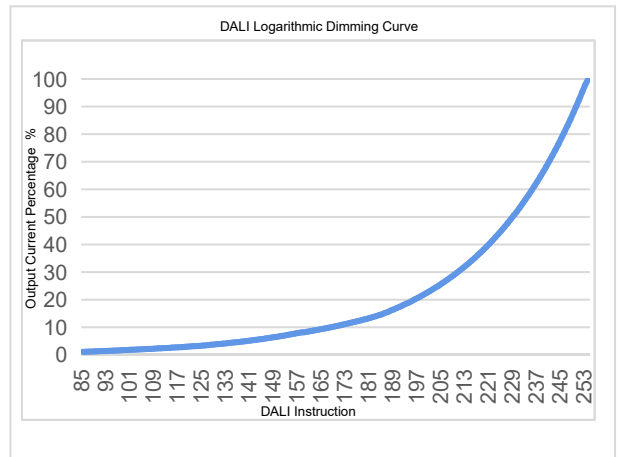

■ **Structure & Dimensions (unit: mm)**

Appearance dimension

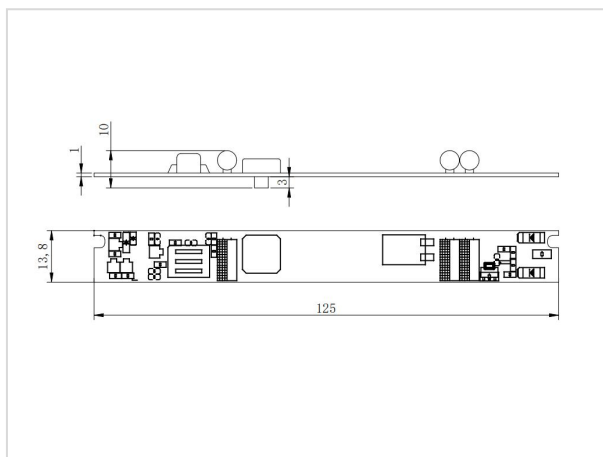

■ **Packaging Specifications**

Model	LF-BAD028-0700-42B
Carton Size	385*285*210 mm (L*W*H)
Quantity	20 pcs/layer; 11 layers/ctn; 220 pcs/ctn
Weight	0.01 kg/pc; 3.00 kg/ctn

## ■ Transportation and Storage

### 1. Transportation

- Suitable transportation means: vehicles, boats and aeroplanes.
- In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

### 2. Storage

- The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

## Cautions

- Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.
- Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.
- Man-made damage is beyond the scope of Lifud warranty service.

Remark: Lifud Tecnology Co., Ltd. reserves the right to interpret any contents of this specification.